


1

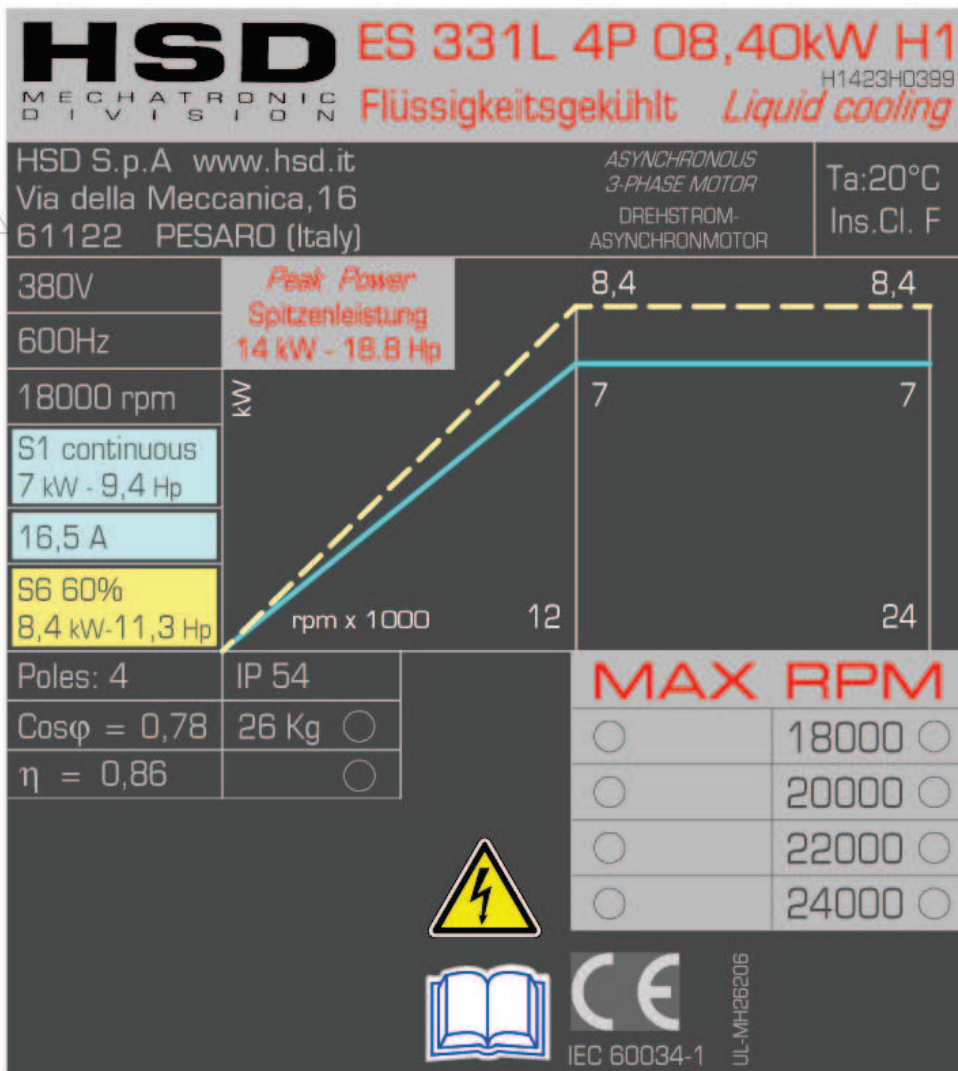

SCALA 2 : 1

H1423H0399 Rev.00

(SP.090.110.45)

Tensione nominale (*)	Nennspannung (*)	Rated voltage (*)	V	260		380		380	
Frequenza nominale	Nennfrequenz	Rated frequency	Hz	400		600		800	
Velocità nominale	Nominale Geschwindigkeit	Rated speed	rpm	12000		18000		24000	
Tipo di servizio	Betriebsart	Duty type		S1 cont	S6 60%	S1 cont	S6 60%	S1 cont	S6 60%
Potenza nominale	Nennleistung	Rated power	kW	7	8,4	7	8,4	7	8,4
Coppia nominale	Nennmoment	Rated torque	Nm	5,6	6,7	3,7	4,5	2,8	3,3
Corrente nominale	Nennstrom	Rated current	A	23,0	27,5	16,5	20,1	16,0	18,9
Rendimento nominale η	Nennwirkungsgrad η	Rated efficiency η		0,86					
Fattore di potenza $\cos \varphi$	Leistungsfaktor $\cos \varphi$	Power factor $\cos \varphi$		0,78					
Numero di poli	Polzahl	Number of poles		4					
Classe di isolamento	Isolierklasse	Insulation class		F					
Tipo di raffreddamento	Kühlungstyp	Type of cooling		Raffreddamento a liquido / Flüssigkeit / Liquid cooling					
Peso	Gewicht	Weight	kg	26					

[(*) fornita da inverter]

[(*) von Inverter
geliefert]

[(*) from inverter]